


## Low Water Cut-Offs – Mechanical For Steam and Hot Water Boilers

### Series 764 Low Water Cut-Offs

- For residential, commercial, and industrial boiler applications of any steaming capacity
- Heavy duty
- Adjustable BX outlet for easy installation
- Dual precision switches for dependable operation of the low water cut-off and alarm or electric water feeder
- Packless bellows
- 2½" NPT side tapping provided for installation with close nipple
- Maximum boiler pressure 50 psi (3.5 kg/cm<sup>2</sup>)

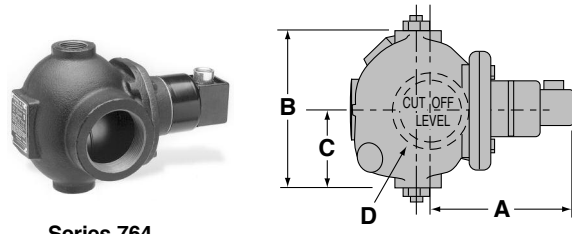

Series 764

### Electrical Ratings

| Voltage | Motor Switch Rating (Amperes) |              | Pilot Duty               |
|---------|-------------------------------|--------------|--------------------------|
|         | Full Load                     | Locked Rotor |                          |
| 120 VAC | 7.4                           | 44.4         | 125 VA at 120 or 240 VAC |
| 240 VAC | 3.7                           | 22.2         |                          |

### Dimensions, in. (mm)

| A        | B        | C       | D      |
|----------|----------|---------|--------|
| 6⅞ (175) | 6½ (165) | 3⅞ (79) | 2½ NPT |

### Ordering Information

| Model Number | Part Number | Description       | Weight lbs. (kg) |
|--------------|-------------|-------------------|------------------|
| 764          | 144500      | Low water cut-off | 12.5 (5.7)       |