


# Production Transformers

## Ferromagnetic, Two Pole, Mid Point Ground Models

These devices are designed for CONSTANT DUTY and provide the most reliable ignition source for oil burners and commercial/industrial gas applications.

### Absolute Maximum Ratings

Model #	2721, 421	2744, 444	911	2730, 912	2714
Input Supply Voltage (V)	120	240	240	120	120
Input Supply Frequency (Hz)	60	60	50	50	60
Primary Voltage - Amperes (VA)	250	250	250	250	275
Secondary Voltage (RMS)	10,000	10,000	10,000	10000	12000
Secondary Short Circuit Current (mA)	23	23	23	23	20
Storage Temperature (degrees C)	-40 to +80	-40 to +80	-40 to +80	-40 to +80	-40 to +80
Operating Temperature (degrees C)	-30 to +40	-30 to +40	-30 to +40	-30 to +40	-30 to +40
Operating Relative Humidity (%)	90	90	90	90	90
Loading Air Gap (inches)	1/8 - 3/16	1/8 - 3/16	1/8 - 3/16	1/8 - 3/16	1/8 - 3/16

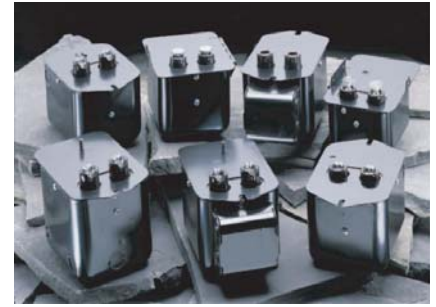

[www.allanson.com](http://www.allanson.com)

**USA** | 99 Adams Blvd. | Farmingdale, New York | 11735  
 Phone: 631-293-3880 | Fax 1-631-293-3470

**CANADA** | 33 Cranfield Road | Toronto, Ontario | M4B 3H2  
 Phone: 416-755-1191 | Toll-Free 1-877-264-8444 | Fax 1-877-278-0907